



PRINTDOT EP19

Specification

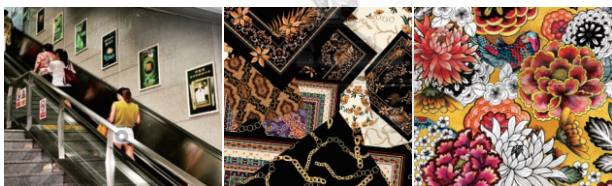

Machine Model	A1/E1 Digital Inkjet Printer EP1901/1902/1904					
Print Head	1H		2H		4H	
Print Mode	360/1200 2p	360/2400 4p	360/1200 2p	360/1800 4p	360/1200 2p	360/2400 4p
Speed	40sqm/h	20sqm/h	90sqm/h	45sqm/h	160sqm/h	85sqm/h
Print Width	1.9M (printing table 2.05meters)					
Printer Interface	GB NET WORK					
Media Transmission	Roll to Roll					
Data Transfer	Edge RIP while print / RIP post-print					
RIP Software	PHOTOPRINT,MAINTOP,NEOSTAMPA, WASATCH					
Heating System	Four-heating:Before printing,printing,printing post,Ink heating					
Drying System	Infrared drying and fan-air dry					
Cleaning System	Separation dual function of pressure and suction cleaning					
Material Systems	Normal double motor rewinder / swing roller tension rewinder / airshaft system,					
Ink Types	C,M,Y,K, LC, LM , O, R , G , B, fluorescent color					
Power Requirements	220 VAC ,<4A, 50/60HZ + heater 220 VAC ,<50A,50/60HZ					
Working Environment	Temperature:23°C ~28°C , Humidity:45%~55%RH					
Media Type	flex banner , vinyl , non-wooden cloth, wall paper , pp paper , sublimation paper					
Dimensions	2900*1030*1570 mm ³ (L*W*H) woodcase 3000*760*620mm ³					
NW/GW	240KG/280KG					
Quality parts	German Igus drag chain	German Igus Power cable	Italy Elateck belt	Full aluminum beam	Smart hot wind drying high efficient	
	Japan THK guide rail	Japan NSK bearing	Japan Omron sensors	Smart pinch roller		

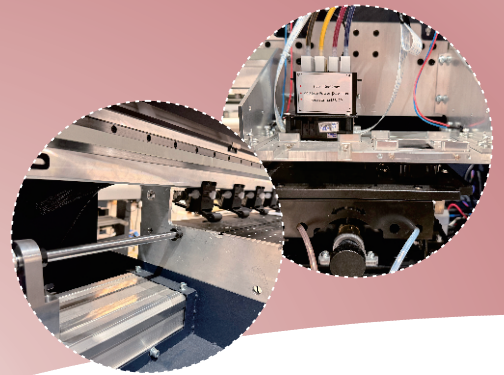

浙江普印科技有限公司

地址:浙江省嘉兴市秀洲区加创路1509号12号厂房
Add:BLD 12 , No1509 , Jiachuang Road , Xiuzhou district,
Jiaxing city , Zhejiang province , China

