


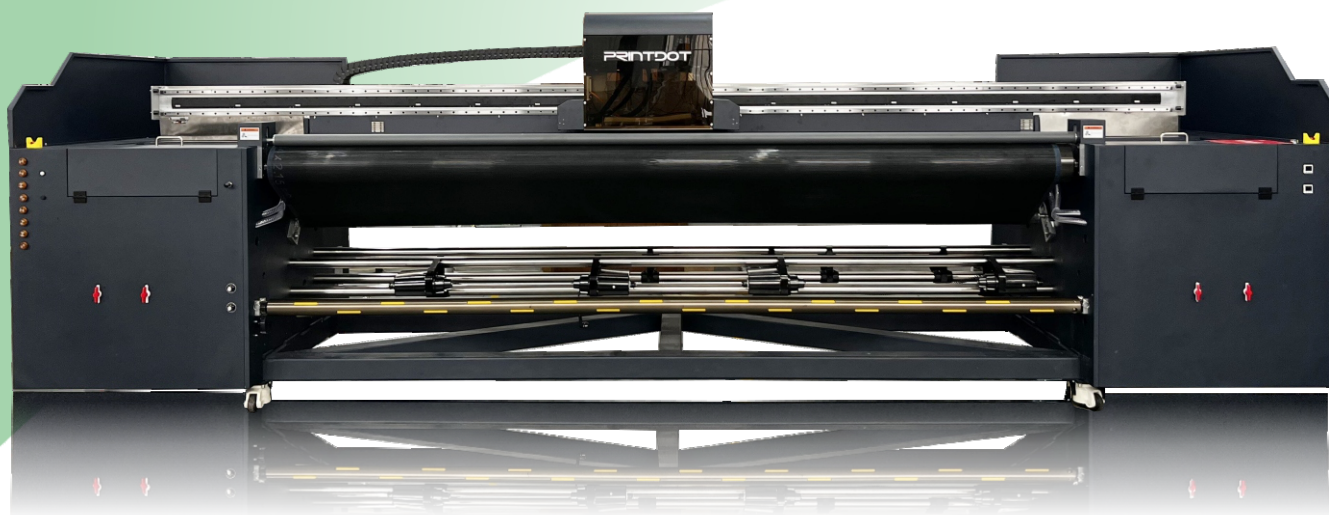


PRINTDOT

Hb3516

Specification

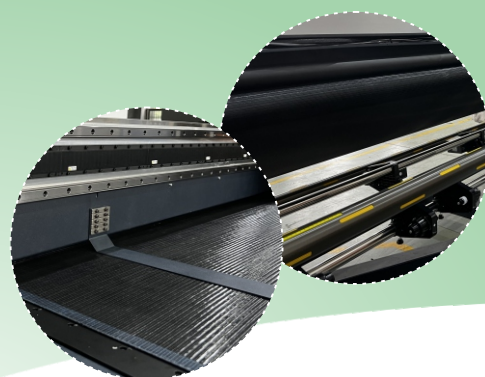

Machine Tyoe	HYBRID UV Digital Inkjet Printer HB3516 G5/6							
Print Head	4H			8H			16H	
Print Mode	720/600 4p	720/900 6p		720/600 4p	720/900 6p		720/600 4p	720/900 6p
Speed with 8 heads	45sqm/h	35sqm/h		90sqm/h	75sqm/h		180sqm/h	150sqm/h
Print Width	3.4M (printing table 3.5meters)							
Printer Interface	USB3.0							
Media Transmission	Roll to Roll							
Data Transfer	Edge RIP while print / RIP post-print							
RIP Software	PHOTOPRINT,MAINTOP,ERGO SOFT							
Heating System	UV LAMP							
Drying System	Infrared drying and fan-air dry							
Cleaning System	Separation dual function of pressure and suction cleaning							
Material Systems	belt conytor , airshaft system							
Ink Types	C,M,Y,K, LC, LM , W, V							
Power Requirements	220 VAC , <16A, 50/60HZ							
Working Environment	Temperature:23°C ~28°C , Humidity:45%~55%RH							
Media Type	flex banner , vinyl , non-wooden cloth, wall paper , pp paper , foam board , glass							
Dimensions	5460*1430*1780 mm(L*W*H)							
NW/GW	1600KG/2200KG							
Quality parts	German Igus drag chain	German Igus Power cable	Italy Elateck belt	Full aluminum beam	Standard nagetive pressure			
	Japan THK guide rail	Japan NSK bearing	Japan Omron sesors					



浙江普印科技有限公司

地址:浙江省嘉兴市秀洲区加创路1509号12号 厂房
Add:BLD 12 , No1509 , Jiachuang Road , Xiuzhou district,
Jiaxing city , Zhejiang province , China

