
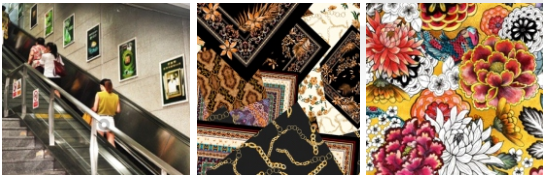


PRINTDOT

PY1902

Specification

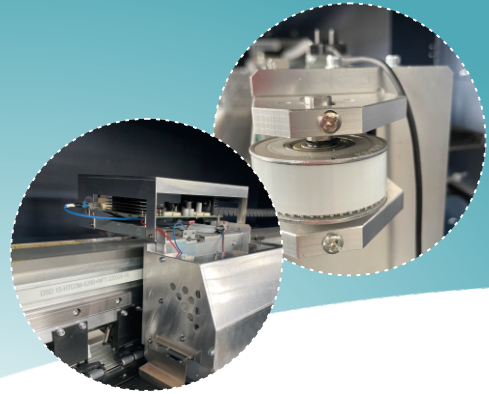

Machine Tyoe	A1/E1 Digital Inkjet Printer PY1902/1903/1904/1906									
	2H			4H			6H			
Print Head										
Print Mode	360/1200 2p	360/1800 3p	360/2400 4p	360/1200 2p	360/1800 3p	360/2400 4p	360/2400 4p	360/1200 1p	360/1800 3p	360/2400 4p
Speed with 8 heads	90sqm/h	60sqm/h	45sqm/h	160sqm/h	120sqm/h	90sqm/h	90sqm/h	240sqm/h	180sqm/h	90sqm/h
Print Width	1.9M (printing table 2.05meters)									
Printer Interface	GB NET WORK									
Media Transmission	Roll to Roll									
Data Transfer	Edge RIP while print / RIP post-print									
RIP Software	PHOTOPRINT,MAINTOP,NEOSTAMPA, WASATCH									
Heating System	Four-heating:Before printing,printing,printing post,lnk heating									
Drying System	Infrared drying and fan-air dry									
Cleaning System	Separation dual function of pressure and suction cleaning									
Material Systems	Normal double motor rewinder / swing roller tension rewinder / airshaft system,									
Ink Types	C,M,Y,K, LC, LM , O, R , G , B, fluorescent color									
Power Requirements	220 VAC ,<4A, 50/60HZ + heater 220 VAC ,<50A,50/60HZ									
Working Environment	Temperature:23°C ~28°C , Humidity:45%~55%RH									
Media Type	flex banner , vinyl , non-wooden cloth, wall paper , pp paper , sublimation paper									
Dimensions	3300*1030*1570 mm(L*W*H)									
NW/GW	350KG/450KG									
Quality parts	German Iigus drag chain	German Iigus Power cable	Italy Elateck belt	Full aluminum beam	Standard negative pressure					
	Japan THK guide rail	Japan NSK bearing	Japan Omron sensors	Smart pinch roller	Smart hot wind drying high efficient					



浙江普印科技有限公司

地址:浙江省嘉兴市秀洲区加创路1509号12号厂房
Add:BLD 12 , No1509 , Jiachuang Road , Xiuzhou district,
Jiaxing city , Zhejiang province , China

Panasonic
INDUSTRY

NSK
MOTION & CONTROL

tech

igus