



PRINTDOT

S3200RR

Specification

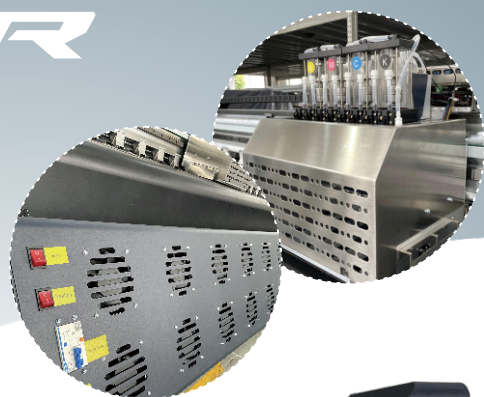

Machine Tyoe	KM SOLVENT Digital Inkjet Printer						
Print Head	4 or 8 KONICA512i- 6~30PL			4 or 8 KONICA1024i- 6~30PL			
Print Mode	360*360 dpi/2P	360*540 dpi/3P	480*720 dpi/4P	360*360 dpi/1P	360*720 dpi/2P		
Speed with 8 heads	240sqm/h	180sqm/h	110sqm/h	540sqm/h	240sqm/h		
Print Width	3300 mm						
Printer Interface	USB						
Media Transmission	Roll to Roll						
Data Transfer	Edge RIP while print / RIP post-print						
RIP Software	PHOTOPRINT,MAINTOP						
Heating System	Four-heating:Before printing,printing,printing post,Ink heating						
Drying System	Infrared drying and fan-air dry						
Cleaning System	Separation dual function of pressure and suction cleaning						
Material Systems	(Sent/received)feeding standard to close material matching						
Ink Types	C,M,Y,K four-color						
Power Requirements	220 VAC ,<4A, 50/60HZ + 220 VAC ,<50A,50/60HZ						
Working Environment	Temperature:20°C ~30°C , Humidity:45%~55%RH						
Media Type	flex banner , vinyl , non-wooden cloth, wall paper , pp paper						
Dimensions	4700*1030*1570 mm(L*W*H)						
NW/GW	1000KG/1200KG						
Quality parts	German Iigus drag chain	German Iigus Power cable	Italy Elateck belt	Full aluminum beam	Full aluminum beam	Standard nagetive pressure	
	Japan THK guide rail	Japan NSK bearing	Japan Omron sesors	Smart pinch roller	Smart pinch roller	Smart hot wind drying high efficient	



浙江普印科技有限公司

地址:浙江省嘉兴市秀洲区加创路1509号12号厂房
Add:BLD 12 , No1509 , Jiachuang Road , Xiuzhou district,
Jiaxing city , Zhejiang province , China

Panasonic
INDUSTRY

NSK
MOTION & CONTROL

tech

igus