




PrintDot

Put your business in the hannds of someone who knows

参数parameters			
型号Model	F1 8Hi3200	F1 15Hi3200	
打印喷头Print-Head	I3200-A1/I3200-E1		
打印速度Speed	F1 8Hi3200 1P 300-340	2P 150-170	
	F1 15Hi3200 1P 520-560	2P 260- 280	
打印宽幅Width	F1 8Hi3200: 2m		
	F1 15Hi3200: 1.8m		
配置一	F1 8Hi3200		
Large Aluminum Beam 3160mm 高精密铝梁3160mm	Ultraprint/Maintop, Photoprint/Onyx (Optional) 瑞彩/蒙泰, PP/ONYX选配	THK/HIWIN quiet high precision guid rail with Doulbe guid block 日本THK/台湾上银 超静音双滑块导轨	Germany LGUS Drag Chain 德国易格斯静音高性能拖链
Germany LCUS Power cable 德国易格斯耐弯折高柔线	Omrons original sensors package 日本欧姆龙高性能传感器组	Italy ELATECH quiet Belt 意大利伊拉泰静音内钢丝皮带	
配置二	F1 15Hi3200		
Large Aluminum Beam 3160mm 高精密铝梁3160mm	Ultraprint/Maintop, Photoprint/Onyx (Optional) 瑞彩/蒙泰, PP/ONYX选配	THK/HIWIN quiet high precision guid rail with Doulbe guid block 日本THK/台湾上银 超静音双滑块导轨	Germany LGUS Drag Chain 德国易格斯静音高性能拖链
Germany LCUS Power cable 德国易格斯耐弯折高柔线	Omrons original sensors package 日本欧姆龙高性能传感器组	Italy ELATECH quiet Belt 意大利伊拉泰静音内钢丝皮带	Import Japan/ German motors 进口日本/德国电机
PLC industrial rewinder system 进口PLC收放料系统	optional: Industrial 10,000 meters A shaft media system 选配: 工业万米卷	Auto puming ink system 自动泵墨系统	
设备概览Features			
Heavy-Duty Deluxe extended frame 高性能重型机身	High Mechanical Strength and precision 高强度结合高精度打印	The standard infrared heating 标配红外干燥	

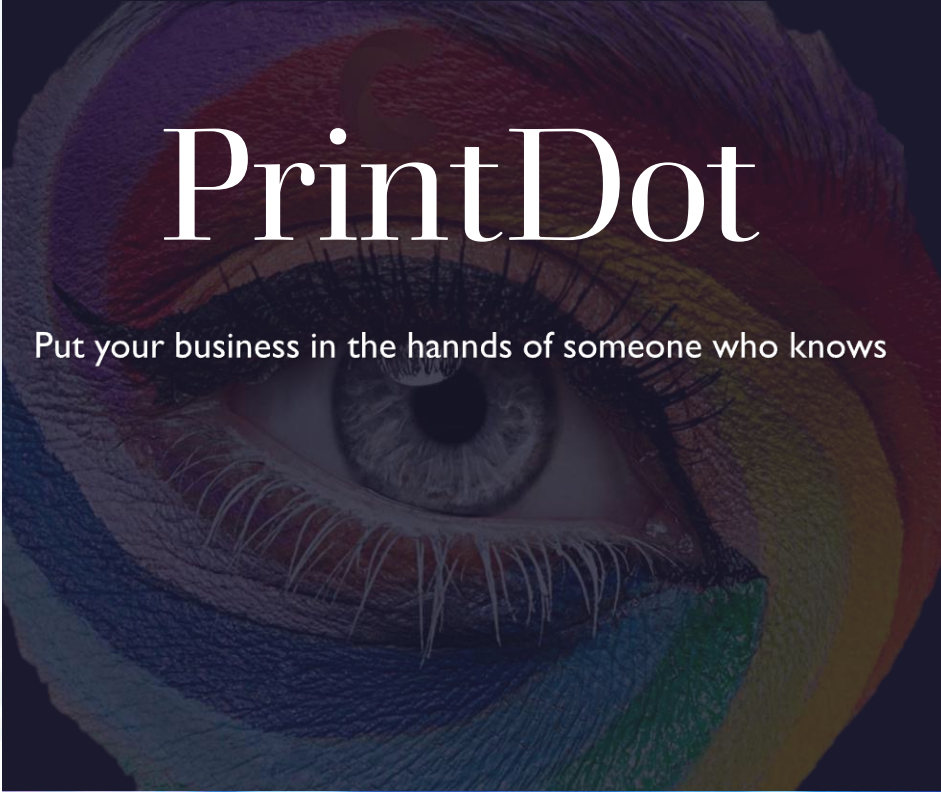

Equipo Sublimación
Modelos: F1-8Hi3200
F1-15Hi3200