


PRINTDOT ALITA-D

Specification



Machine Model	Alita-D			
Print Head	KYO-EX600 24H			
Print Mode	508*600dpi-1pass:	600*600dpi-1pass:	508*1200dpi-2pass	508*1800dpi-3pass
Speed	690sqm/h	612sqm/h	360qm/h	240qm/h
Print Width	2.0M			
Printer Interface	USB3.0			
Media Transmission	Roll to Roll			
Data Transfer	Edge RIP while print / RIP post-print			
RIP Software	neoStampa DELTA Standard Rapport			
Heating System	Ink temp control heating system, Digital printing drying oven with electric heating / steam heating / natural gas heating (optional)			
Ink System	Automatic ink supply, automatic degassing and automatic negative pressure system			
Cleaning System	Automatic cleaning and capping system			
Material Systems	Φ1600 (optional external unwinder), supports fabric cart feeding			
Ink Types	C,M,Y,K, LC, LM, O, R, G, B, fluorescent color, acid ink, reactive ink, high-temperature disperse ink, and water-based pigment ink.			
Power Requirements	220 VAC ,<30A, 50/60HZ			
Working Environment	Temperature:23°C ~28°C , Humidity:45%~55%RH			
Media Type	Cotton, linen, silk, nylon, polyester, blended fabrics, elastic fabrics, new-type fiber woven and knitted fabrics			
Dimensions	2102x860x1550 mm ³ (L*W*H) woodcase 2224x1120x800mm ³			
Water supply	0.4MPa-1000L/hr			
Quality parts	German Igus drag chain	German Igus Power cable	Italy Elateck belt	Stainless Metal big beam
	Japan THK guide rail	Japan NSK bearing	Japan Omron sesors	Camera position print support

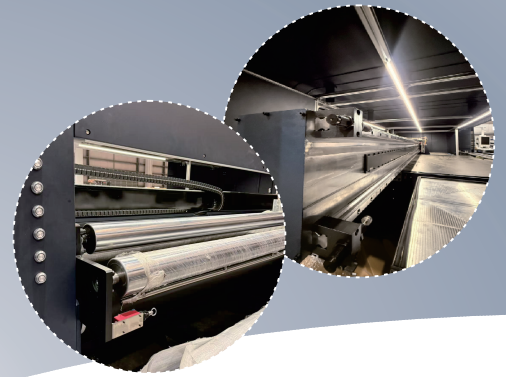

浙江普印科技有限公司

地址:浙江省嘉兴市秀洲区加创路1509号12号厂房
Add:BLD 12, No1509, Jiachuang Road, Xiuzhou district,
Jiaxing city, Zhejiang province, China

